



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 03 JUN 2004

WIPO

PCT

17L 030604  
IB/2004/050806

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03101674.4

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:  
Application no.: 03101674.4 ✓  
Demande no:

Anmeldetag:  
Date of filing: 10.06.03 ✓  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Shaving apparatus

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

B26B19/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

## Shaving apparatus

The invention relates to a shaving apparatus having a skin contact surface accommodating at least one cutting unit comprising an external cutting member and a matching internal cutting member, and a device for providing a shaving aid to said skin contact surface.

5

Such a shaving apparatus is for instance known from WO 98/08660. This known shaving apparatus (or shaver) has three cutting units or shaving heads, which are provided in the skin contact surface. Each shaving head comprises an annular region  
10 provided with hair-trapping apertures, and a rotating (in use) internal cutting member having a number of knives for cutting hair protruding through the hair-trapping apertures. The skin contact surface in use contacts and supports the skin of the user during shaving and therefore also is called a skin support surface or skin support region. The skin contact surface surrounds the annular regions of the shaving heads and further includes the region(s)  
15 enclosed by the annular region(s) of the shaving head(s).

A shaving apparatus of the above type typically includes a holder for an additive or shaving aid like a shaving liquid, as well as means for supplying a certain amount of additive to the skin contact surface during shaving. Generally a push button will be provided which may be operated by the user of the shaver whenever he desires to obtain or  
20 increase a gliding effect provided by the additive.

A problem of the known shavers is that the shaving aid supplied to the skin contact surface has a tendency to flow into the shaving head(s) because of suction forces caused by the rotating internal cutting member(s).

For obvious reasons the size of a holder for shaving aid cannot be very large.  
25 Thus in order to obtain a suitable period of use between the moment the shaving aid holder is filled and the moment the holder must be refilled or, if the holder is (part of) a replaceable cartridge, to obtain a suitable period of use of such a cartridge, it is desired that the shaving aid be used as effective as possible. Of course an optimum effective use of such shaving aid is not possible if the shaving aid supplied to the skin contact surface of a shaver is rapidly

drained away through the hair trapping apertures of the shaving head(s). Moreover, if it only would take a short time before the shaving aid is drawn away from the skin contact surface through the hair trapping apertures a certain risk exists that the shaving head will run dry and a user with a sensitive skin will damage his skin. Obviously this is undesirable.

5

In view of the above it is an object of the present invention to provide a shaving apparatus providing an improved effectiveness of the shaving liquid and/or other additive supplied to the skin contact surface of the shaving apparatus.

10

To this end a shaving apparatus of the type indicated above is characterized by shaving aid retaining means provided on at least part of the skin contact surface.

15

The invention will now be described in more detail, by way of example, with reference to the drawing.

Fig. 1 shows an example of a prior art shaving apparatus having three shaving heads;

20

Fig. 2 diagrammatically shows, partly in cross-section a shaving apparatus similar to the apparatus of fig. 1 and in particular shows means for supplying additive to the skin contact surface;

Fig. 3 diagrammatically shows a top view of an example of a shaving head holder for a shaving apparatus of the present invention;

Fig. 4 diagrammatically shows, partly in cross-section an embodiment of a shaving head of a shaving apparatus in accordance with the invention;

25

Fig. 5 diagrammatically shows in cross-section a detail of fig. 3;

Fig. 6 diagrammatically shows a view in perspective partly in cross-section along the line VI-VI in fig. 3 of a ring-shaped element surrounding a shaving head in accordance with the invention;

30

Fig. 7 diagrammatically shows another type of shaving apparatus in which the invention may be embodied; and

Fig. 8 diagrammatically shows a detail of an embodiment of a shaving apparatus of the vibrating type.

Fig. 1 shows a prior art shaving apparatus to which the invention may be applied, and fig. 2 shows a similar shaving apparatus.

The shown apparatus 10 has a housing 1 and a shaving-head holder 2, which holder can be detached from the housing and/or is hinged to the housing. Three shaving heads or cutting units 3 are present in the shaving-head holder, each comprising a stationary external cutting member 4 provided with hair trapping apertures 5 and an internal cutting member 6 with cutters 7 which can be driven into rotation with respect to the external cutting member. Further an on/off switch 8 is provided.

As shown in fig. 2 the internal cutting member 6 is driven by a motor 11, through suitable transmission means 12,13.

The shaving head holder 2 has a skin contact surface 9 including a first skin contact region 15 surrounding the shaving head(s) 3 and a second skin contact region 16 enclosed by the stationary annular cutting member of each shaving head.

The shaver 10 has a space 17 for accommodating a holder 40 for shaving aid. The space 17 in this example further accommodates a pump 20 for pumping shaving aid from the holder to an outlet opening 18 in or near the skin contact surface of the shaver. A switch, in this case a push-button switch 19, has been provided for operating the pump 20. Further details of the shaver 10, in particular the holder and the pump may be found in WO 98/08660.

Fig. 3 shows a top view of an example of a shaving head holder 2 for a shaver in accordance with the present invention. The shaving head holder is similar to the shaving head holder shown in fig. 1 and has three cutting units 3. In fig. 3 the same reference numerals as in the other figs. have been used for similar parts. The holder has a hard shell 40 provided with hinge elements 41 for mounting the shaving head holder onto the housing of a shaver. The shaving head holder accommodates a skin support member 42, which in turn accommodates the three cutting units 3. The skin support member has three sections 42a, 42b and 42c which are connected to each other by pivot lines 43, 44, 45 allowing a pivoting movement of the cutting units with respect to each other. Thereby the shaving heads may adapt to the local shape of the face of the user. Each section 42a, 42b, 42c has a kind of socket like an eye socket, accommodating a having head.

Fig. 4 diagrammatically shows a view of an example of a shaving head or cutting unit 3, partly in cross-section, in accordance with the present invention. The shaving head as shown is generally similar to the shaving heads of the prior art shavers. Various parts

of the shaving head of fig. 4 have been indicated by reference numbers corresponding to the reference numbers used in the other figs. for similar parts.

The shaving head of fig. 4 differs from shaving heads of prior art shavers in that shaving aid retaining means have been provided in the skin contact region 16 within the annular cutting member 4. The shaving aid retaining means in this example comprise a number of concentric ridges 30, 31, 32. In this example the concentric ridges are part of a profiled decoration cap 33 which is placed on a flat part 34 of the shaving head within the annular cutting member 4. If so desired the part 34 itself could be provided with a profiled surface. The decoration cap 33 is shown in cross-section on a somewhat larger scale in fig. 5.

The profiled decoration cap in this embodiment has a generally slightly domed shape and has three circular concentric gently sloping ridges 30, 31, 32. Any shaving aid present on the decoration cap, i.e. between the decoration cap and the skin of the user, will to a certain extent be retained in the grooves 34, 35, 36 between the ridges and will be prevented from flowing straight to the hair trapping apertures 5. In fact the grooves 34, 35, 36 function as temporary storage zones for shaving aid. On average the time it takes for a certain quantity of shaving aid on the decoration cap to completely flow away through the hair trapping apertures will be notably longer if a profiled decoration cap is used instead of a prior art flat cover.

Though the shaving aid retaining means described above and shown in figs. 4 and 5 do comprise a number of circular concentric ridges it will be understood that any type of profile which prevents additive from flowing straight and unimpeded to the hair trapping apertures may be used. For instance a star shaped, flower shaped or spiral shaped pattern of ridges, or a pattern of dimples as on a golf ball or similar surface patterns might be used. Further the decoration cap may have a low friction surface.

In use of the shaving apparatus shaving aid will also be present in the skin contact region 15 on the skin support member 42 surrounding the shaving head(s). Such shaving aid too will be sucked into the hair trapping apertures. In order to prevent this from happening shaving aid retaining means may be provided around the shaving head(s). In accordance with an embodiment of the invention at least one groove surrounds the each annular cutting member. An example of such a groove is shown at 48 in fig. 4. Such a groove will prevent shaving aid present in the skin contact region 15 surrounding the shaving head(s) of a shaver from being sucked straight into the shaving head.

In accordance with a further elaboration of the idea of providing a shaving aid retaining groove in the skin contact surface surrounding an annular cutting member, a

separate ring shaped element 46 is provided around each socket for a shaving head. Such a ring shaped element will be mounted in the skin support member around each annular cutting member and will form a low ridge preventing shaving aid from flowing straight from the skin contact region 15 into the hair trapping apertures of a shaving head.

5 Such ring shaped elements 46 may be made from a suitable synthetic material or metal. The ring may be (partly) embedded into the material of the skin support member. During shaving, the top of the ring may be somewhat higher than the surrounding surface of the skin support member region or the top of the ring may substantially be flush with the skin contact region, if at the connecting faces of the shaving head holder and the ring a small  
10 groove is formed. Such a groove may result from a somewhat lower shoulder of the shaving head holder and or the ring, or from deviating facing connecting surfaces of the shaving head holder and the ring near the skin contact surface.

Ring shaped elements as well as a groove surrounding each element has been shown in fig. 3 at 46a, 46b, 46c and 48a, 48b, 48c resp.

15 An example of a part of a shaving head holder provided with a separate ring shaped element 46 has schematically been shown in fig. 6. Fig. 6 shows a view in perspective, partly in cross section along the line VI-VI in fig. 3. Fig. 6 shows part of a section of a skin support member 42 and a corresponding part of a separate ring shaped element 46 mounted in said skin support member. At least partly along the junction of the  
20 ring shaped element 46 and the skin support member 42 a groove 48 is provided in use retaining shaving aid present on the skin support member and preventing such additive from being sucked straight into the hair trapping apertures of the shaving head. The ring shaped element may be circular, but in the embodiment shown a small triangular section is part of the ring shaped element. Said triangular section is located at the center of the shaving head  
25 holder near the Y-shaped junction of the three pivot lines 43, 44, 45. The groove 48 may either extend along the outer contour of the triangular section or may follow the contour of the annular cutting element or both.

30 Preferably the ring shaped elements 46, or at least the top of said ring shaped element has a low friction surface, as may for instance be obtained by high gloss polishing in order to enhance the gliding performance during shaving.

Of course it would be possible to provide two or even more concentric grooves in and/or around the ring shaped elements.

It is observed that a shaving aid additive as referred to in this description may be a liquid or any other type of material suitable for the intended purpose like for instance a gel, a foam, a cream, a water soluble hard material etc..

In the above description the invention has been explained with reference to a shaver having one or more cutting units of the rotary type. However, the invention does apply to other types of electric shavers like shavers having one or more cutting units of a vibrating type. Such cutting units generally have a bank of parallel cutter elements which in use vibrate below a perforated foil. The area around and, if applicable between such vibrating cutters may be provided with shaving aid retaining means in accordance with the present invention.

10 An example of such a shaver is disclosed in WO 02/051598 and has been shown in fig. 7. Fig. 7 diagrammatically shows an electric shaver 50 having a housing 51, a skin contact surface 52 and two cutting units 53 having outer cutting members 55 in the form of shaving foils and inner cutting members 56 cooperating with said foils. The skin contact surface 52 may be provided with one or more ridges and or grooves along the tunnel shaped shaving

15 foils 53. Such ridges and/or grooves may be similar to the ridges and/or grooves disclosed above for the skin support member surrounding the annular cutting members. However in the case of tunnel shaped shaving foils the ridges and/or grooves may just extend along the long side of the foil(s). Of course it would be possible to have such ridges and/or grooves surround the tunnel shaped foil(s). Also instead of elongate ridges and/or grooves a suitable pattern of

20 dimples (golf ball pattern) or the like may be used.

For a shaver having two or more vibrating cutting units it would be possible to use foils covering a cutting unit as well as at least part of the intermediate area 54 between two adjacent cutting units. Such foils would leave a slit or strip shaped area 61 between their adjacent edges as diagrammatically shown in fig 8. It would even be possible to use a single

25 foil suitably shaped with at least two elongate cutting member sections for covering at least two adjacent internal cutting members as well as the intermediate area 54 between said cutting members. The foil(s) need not be perforated in said intermediate area, and might be provided with longitudinal ridges and/or grooves or dimples or the like having a shaving aid retaining effect. However, as the foils are often rather vulnerable it would be possible to

30 provide the strip-shaped area(s) 61 with shaving aid retaining means, possibly in combination with shaving aid retaining means on the foil(s) in the flat area(s) adjacent the cutting units. Such shaving aid retaining means in the strip-shaped area(s) may be provided on strip-shaped elements, which may be replaceable or not, covering at least the strip shaped area(s), as shown at 62 in fig. 8.



As an alternative it would be possible to use a frame 57, for example made of synthetic resin, as shown in fig. 7 above the foils 53. Said frame has a recess 58 for each cutting member which recess has a shape narrowly fitted around the cutting member(s). In the example shown in fig. 7 the frame is designed for two cutting members and has two outer sections 60 extending along the outer edges of the cutting members and one central section 59 extending between the cutting members. The sections 59 and 60 have shaving aid retaining means as disclosed above. Of course it would be possible to use a separate frame for each separate cutting member. The frame or frames may have a low friction surface.

CLAIMS:

1. Shaving apparatus having a skin contact surface (9;52) accommodating at least one cutting unit (3;53) comprising an external cutting member (4;55) and a matching internal cutting member (6;56) and a device (18-20) for providing a shaving aid to said skin contact surface (9;52), characterized by shaving aid retaining means (34-36;48) provided on  
5 at least part of said skin contact surface.
2. Shaving apparatus as claimed in claim 1, wherein said at least one cutting unit (3) is of the rotary type including an external annular cutting member (4) and wherein first shaving aid retaining means (33) are provided on the skin contact surface (9) enclosed by the  
10 external cutting member (4) of the at least one cutting unit (3).
3. Shaving apparatus as claimed in claim 2 wherein, the first shaving aid retaining means comprise at least one ridge (30-32) extending around the center of the skin contact surface (9) enclosed by the annular cutting member (4) of the at least one cutting unit  
15 (3).
4. Shaving apparatus as claimed in claim 3, wherein said at least one ridge comprises at least one of the following configurations:
  - a) a number of concentric ridges
  - 20 b) at least one spiral-shaped ridge
  - c) at least one star-shaped ridge
  - d) at least one flower-shaped ridge.
5. Shaving apparatus as claimed in claim 2, wherein the first shaving aid  
25 retaining means include a pattern of dimples in at least part of the kin contact surface.
6. Shaving apparatus as claimed in any one of claims 2-5, wherein the skin contact surface (9) provided with said first shaving aid means is the surface of a decoration cap (33).

7. Shaving apparatus as claimed in claim 6, wherein the decoration cap has a generally domed shape.

5 8. Shaving apparatus as claimed in claim 6 or 7, wherein the decoration cap has a low friction surface.

9. Shaving apparatus as claimed in any one of claims 2-8, wherein second shaving aid retaining means are provided on the skin contact surface (9) surrounding the at  
10 least one cutting unit.

10. Shaving apparatus as claimed in claim 9, wherein the second shaving aid retaining means include at least one groove (48) surrounding the external stationary annular cutting member (4) of the at least one cutting unit (3).

15

11. Shaving apparatus as claimed in claim 9 or 10, wherein the skin contact surface is the surface (9) of a skin support member (42) having a socket for each cutting unit (3), and wherein a ring shaped element (46) is placed in each of said sockets and encloses a corresponding cutting unit (3), a shaving aid retaining groove (48) being at least partly  
20 provided at the junction of said ring shaped element (46) and the surrounding skin support member (42).

12. Shaving apparatus as claimed in claim 11, wherein at least the top surface of each ring shaped element (46) surrounding a cutting unit (3) is a low friction surface.

25

13. Cutting unit of the rotary type for a shaving apparatus as claimed in anyone of claims 2-12, said cutting unit having an external annular cutting member (4) and a skin contact surface (16) enclosed by the external cutting member (4), wherein said enclosed skin contact surface (16) has been provided with shaving aid retaining means (34-36).

30

14. Shaving apparatus as claimed in claim 1, wherein said at least one cutting unit is an elongate cutting unit (53) of the vibrating type having a perforated foil (55) as an external cutting member, and wherein shaving aid retaining means are provided along at least one of the sides of the at least one cutting unit (53).

15. Shaving apparatus as claimed in claim 14, wherein said at least one of the sides include at least one long side of at least one cutting unit (53).

5 16. Shaving apparatus as claimed in claim 14, wherein a frame (57) is provided having a recess (58) for each cutting unit (53) and having frame sections (59,60) extending along the cutting units, said frame sections at least partly forming skin contact surfaces provided with shaving aid retaining means.

10 17. Shaving apparatus as claimed in claim 14, wherein at least two cutting units (53) are provided, each having a perforated foil (55) extending at least partly over at least one intermediate skin contact surface (54) between two adjacent cutting units, wherein said intermediate skin contact surface is provided with shaving aid retaining means.

15 18. Shaving apparatus as claimed in claim 17, wherein the foils of two adjacent cutting units (53) extend over an intermediate skin contact surface (54) forming a strip-shaped area between their adjacent edges, and wherein at said strip-shaped area shaving aid retaining means are provided.

20 19. Shaving apparatus as claimed in anyone of claims 14-18, wherein said shaving aid retaining means include a number of ridges and/or grooves or a pattern of dimples extending substantially parallel to the elongate cutting units.

25 20. Foil shaped external cutting member (55) for at least one cutting unit (53) of a shaving apparatus as claimed in claim 17 or 18, said foil having at least one intermediate skin contact surface (54) between two cutting member sections (53), said intermediate surface (54) being provided with shaving aid retaining means.

30 21. Frame (57) for a shaving apparatus as claimed in claim 16, said frame having a recess (58) for at least one elongate cutting unit (53) and further having frame sections (59,60) extending along said at least one cutting unit, said frame sections at least partly forming skin contact surfaces provided with shaving aid retaining means.

22. Shaving apparatus as claimed in any one of claims 14-19 or foil shaped cutting member as claimed in claim 20 or frame as claimed in claim 21, wherein said shaving aid retaining means include elongate ridges and/or grooves, or a pattern of dimples.

**ABSTRACT:**

Shaving apparatus having a skin contact surface (9,15,16) accommodating at least one cutting unit (3) comprising an external stationary cutting member (4) and a matching internal cutting member (6) and a device (18-20) for providing a shaving aid to said skin contact surface (9,15,16), wherein shaving aid retaining means (35,48) are provided on  
5 at least part of said skin contact surface (9,15,16).

Fig. 4

1/5

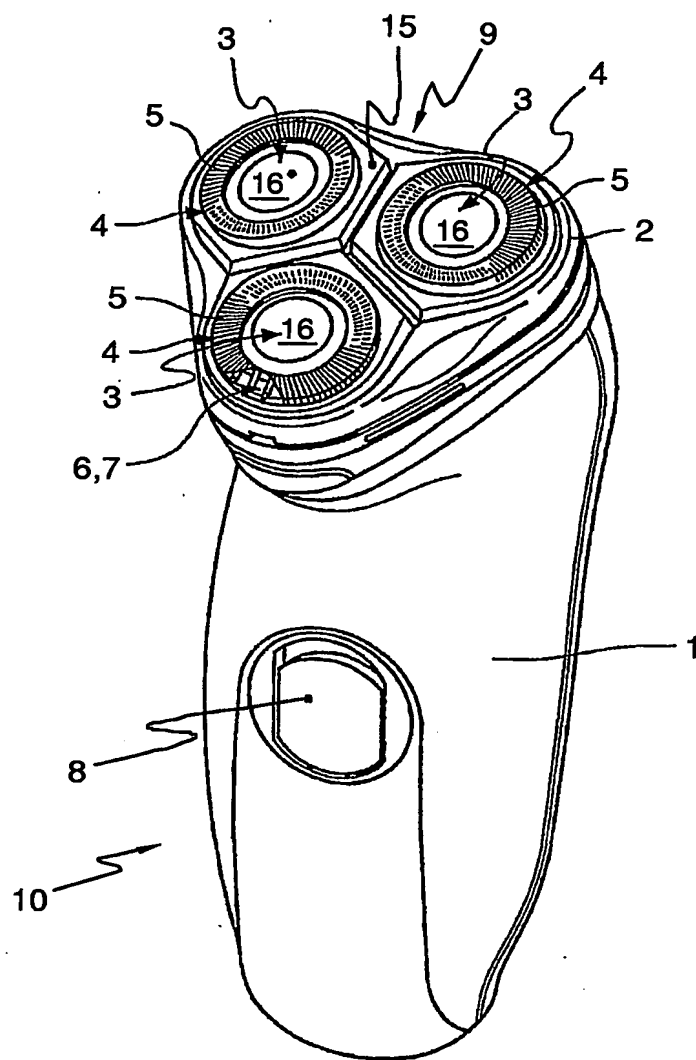


FIG.1

**2/5**

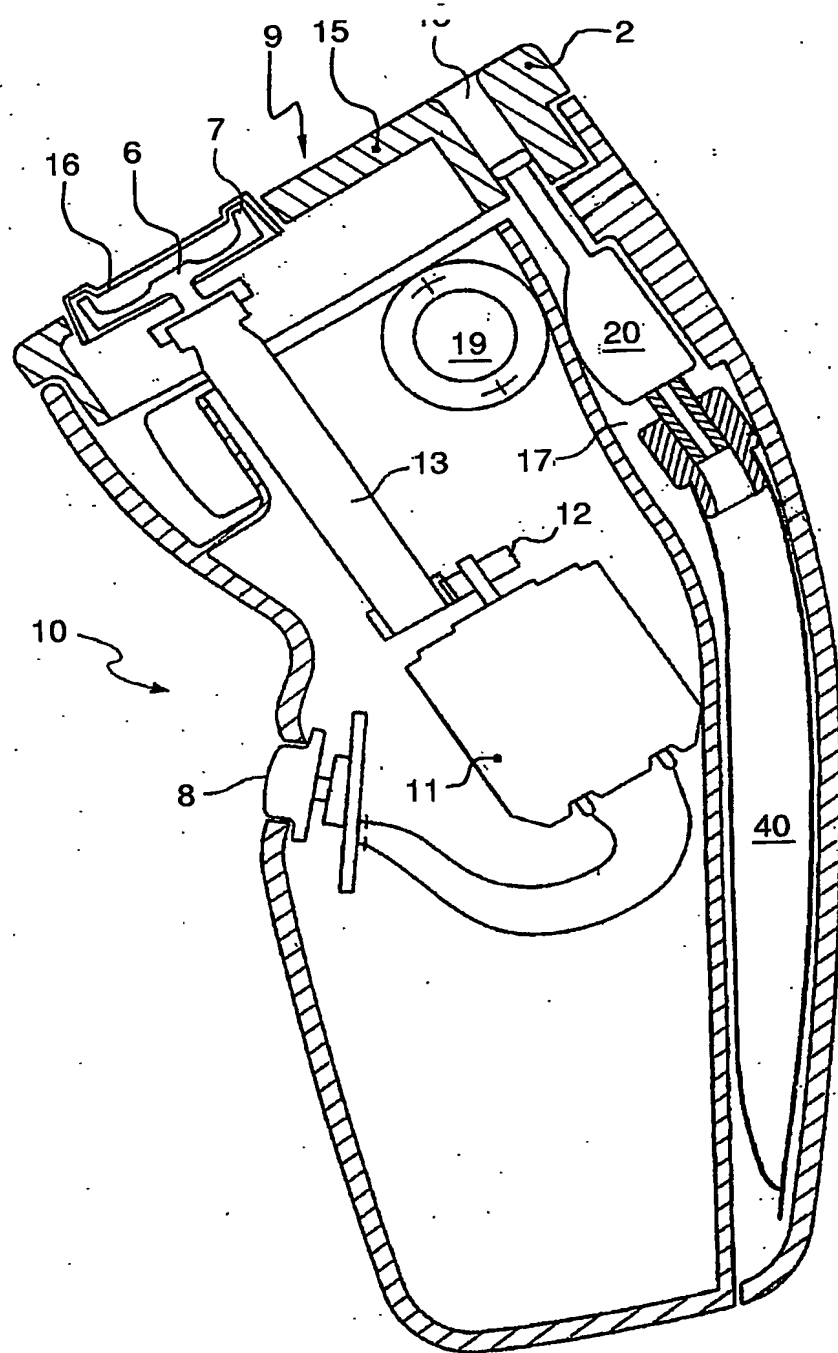


FIG. 2



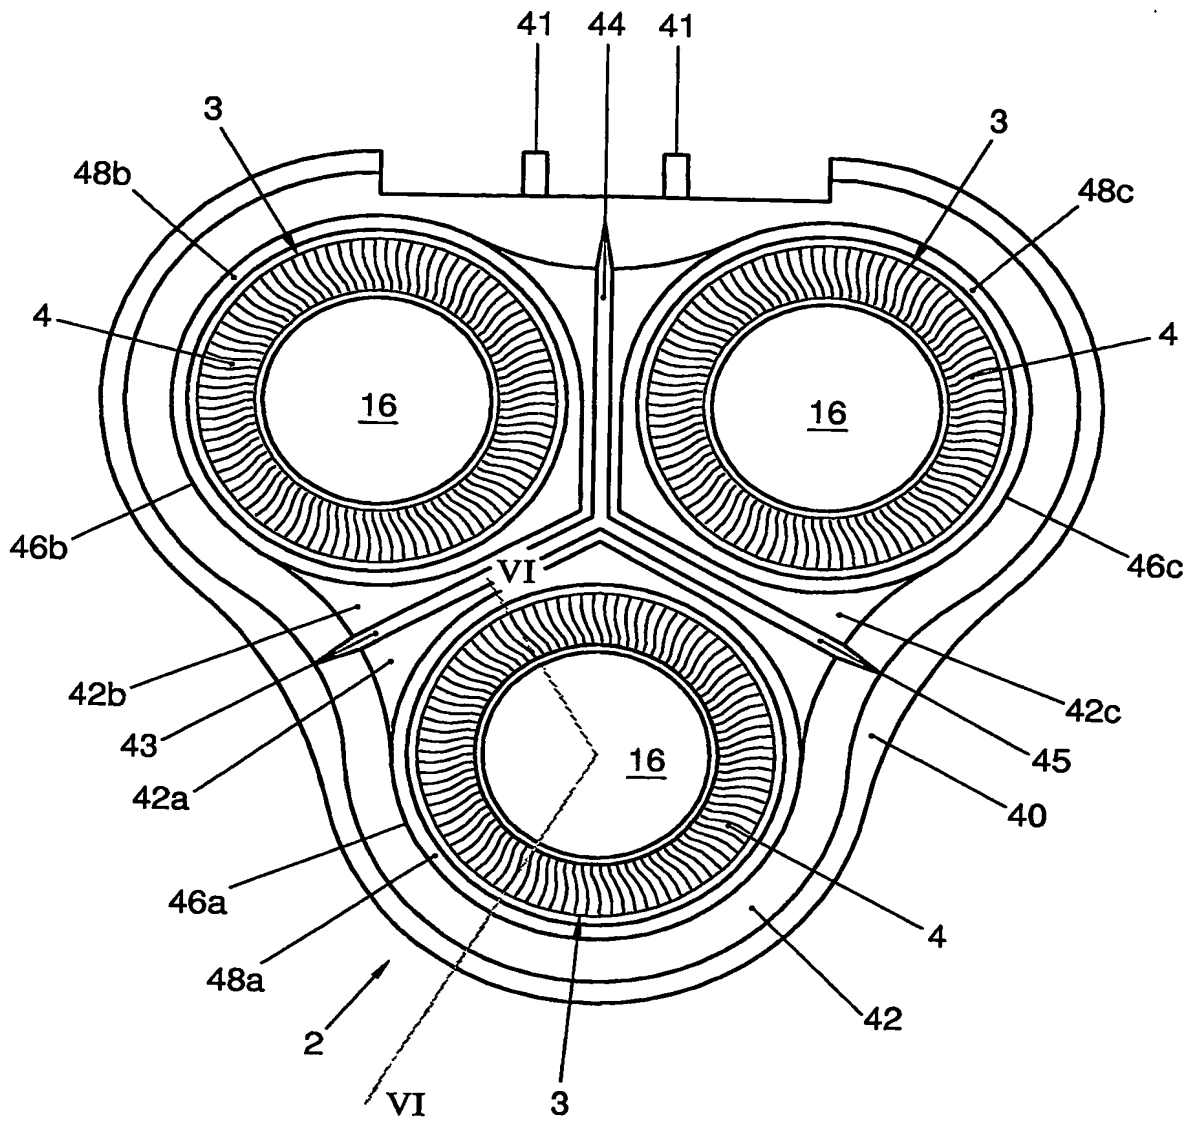


FIG. 3

4/5

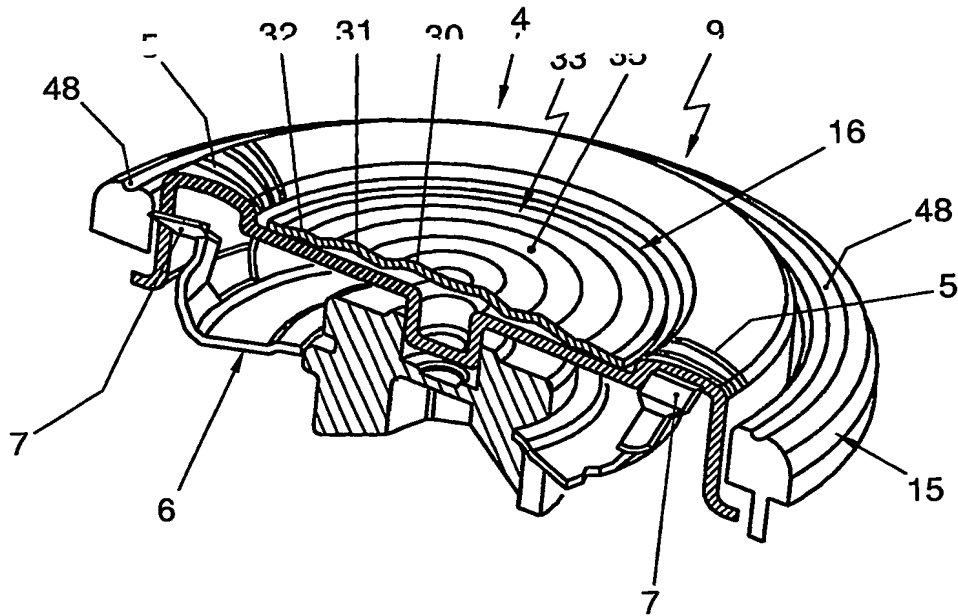


FIG. 4

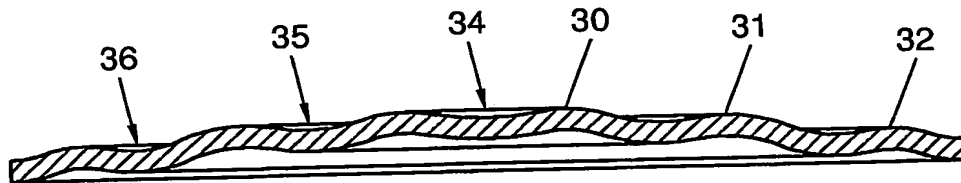


FIG. 5

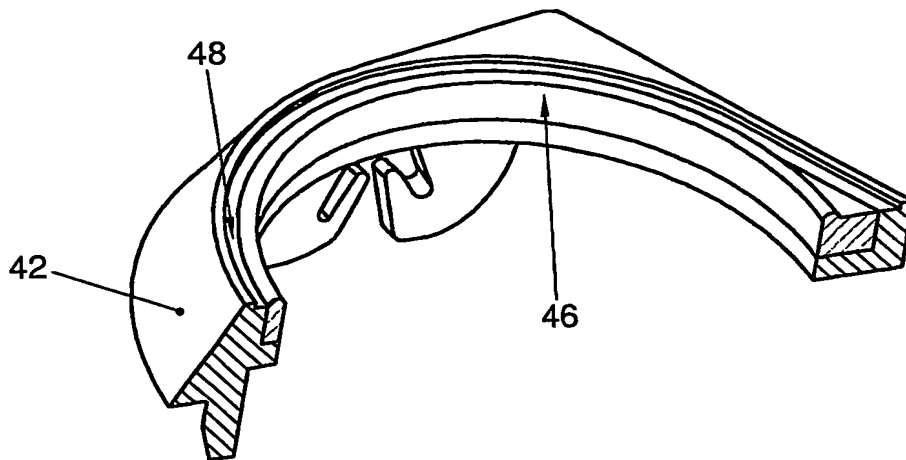
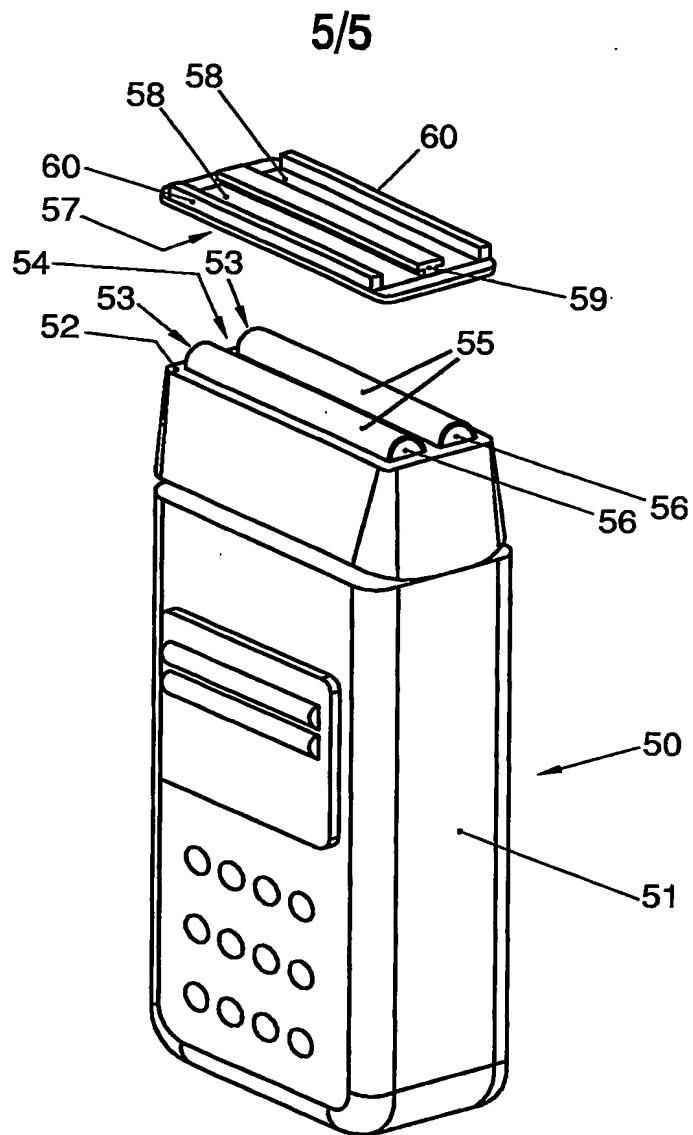
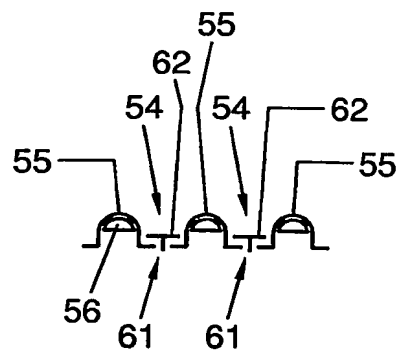


FIG. 6




**FIG. 7**



**FIG. 8**

PCT/IB/04/050806



BEST AVAILABLE COPY

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**BEST AVAILABLE COPY**